



Ultra S mini

A A A
: - 60/

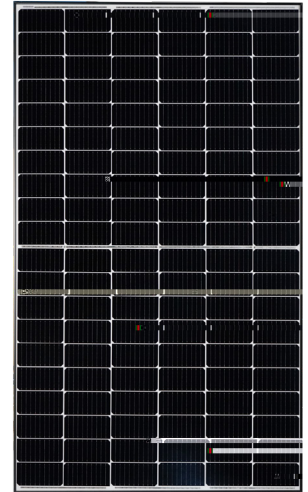

365-385 A
21.1%


| | |
|-------|-------------------|
| 21.1% | |
| 2% | (5400) * (3800) |
| | |

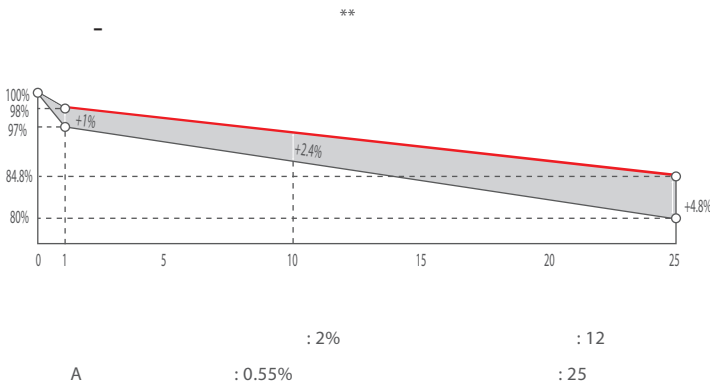

CE IEC 61730 IEC 61215
SA 8000
ISO 9001
ISO 14001
ISO 45001 Occupational Health and Safety
IEC TS 62941



Munich RE ****



STPXXXS - B60/Wnhm 365-385W



| | |
|--|---------------------------------------|
| | 166 |
| | 120 (6 20) |
| | 1756 1039 35 (69.1 40.9 1.4) |
| | 20.3 (44.8 .) |
| | 3.2 (0.126) |
| | 4.0 ² , (-) 350 (+) 160 |
| | 68 (3) |
| | -40 +85 |
| | 1000 / 1500 () |
| | 20 A |
| | 0/+5 |



| | 385 - 60/ | | 380 - 60/ | | 375 - 60/ | | 370 - 60/ | | 365 - 60/ | |
|-----|-----------|-------|-----------|-------|-----------|-------|-----------|-------|-----------|-------|
| | 385 | 290.9 | 380 | 286.3 | 375 | 281.9 | 370 | 278.2 | 365 | 274.3 |
| | 34.9 | 32.4 | 34.7 | 32.2 | 34.5 | 32.2 | 34.3 | 32.0 | 34.1 | 31.8 |
| | 11.04 | 8.99 | 10.96 | 8.92 | 10.87 | 8.76 | 10.79 | 8.69 | 10.71 | 8.62 |
| | 41.5 | 39.0 | 41.3 | 38.9 | 41.1 | 38.9 | 40.9 | 38.7 | 40.7 | 38.5 |
| | 11.72 | 9.46 | 11.64 | 9.39 | 11.57 | 9.24 | 11.49 | 9.17 | 11.42 | 9.10 |
| (%) | 21.1 | | 20.8 | | 20.6 | | 20.3 | | 20.0 | |

1000 / ², 25 A =1.5; : 800 / ², 20 A =1.5, 1 / ; +/- 3%;



| | |
|-----|----------|
| () | 42 2 |
| | -0.36%/ |
| | -0.304%/ |
| | 0.050%/ |



| | | |
|--|----------------|-----|
| | 20 | 40 |
| | 31 | 31 |
| | 6 | 26 |
| | 186 | 806 |
| | 1786 1130 1203 | |
| | 679 | |

Graphs

(385)

