


Ultra X

HALF-CELL MONOFACIAL MODULE

TYPE: STPXXXS - D60/Wmh

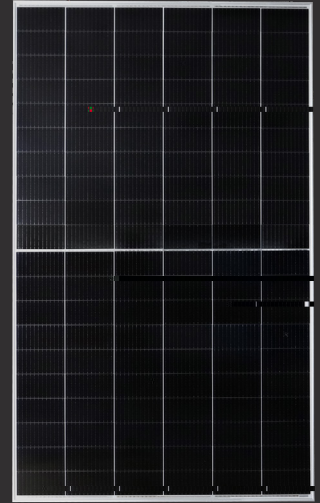

POWER OUTPUT

580-600W

MAX EFFICIENCY

21.2%

Features



High module conversion efficiency

Module efficiency up to 21.2% achieved through advanced cell technology and manufacturing process

Lower operating temperature

Lower operating temperature and temperature coefficient increases the power output



Suntech current sorting process

Up to 2% power loss caused by current mismatch could be diminished by current sorting technique to maximize system power output



Extended wind and snow load tests

Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal) *



Excellent weak light performance


More power output in weak light condition, such as cloudy, morning and sunset



Withstanding harsh environment

Reliable quality leads to a better sustainability even in harsh environment like desert, farm and coastline

Industry-leading Warranty **

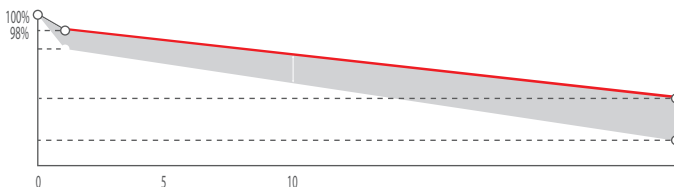

First year power degradation: 2%

Annual degradation: 0.55%

Product warranty: 12 years

linear warranty: 25 years

Certifications and Standards

Social Responsibility Standards
Quality Management System
Environment Management System

Guideline for module design
qualification and type approval



Munich RE 

* Please refer to Suntech Standard Module Installation Manual for details.
** Please refer to Suntech Limited Warranty for details.

*** WEEE only for EU market.
**** Suntech reserves the right to the final interpretation of the warranty by Munich Re.



STPXXS - D60/Wmh 580-600W

Mechanical Characteristics

Solar Cell	Monocrystalline silicon 210 mm
No. of Cells	144 (6 × 24)
Dimensions	2172 × 1303 × 35 mm (85.5 × 51.3 × 1.4 inches)
Weight	31.5 kgs (69.4 lbs.)
Front Glass	3.2 mm (0.126 inches) fully tempered glass
Output Cables	4.0 mm ² , (-) 350 mm (+) 160 mm in length or customized length
Junction Box	IP68 rated (3 bypass diodes)
Operating Module Temperature	-40 °C to +85 °C
Maximum System Voltage	1500 V DC (IEC)
Maximum Series Fuse Rating	30 A
Power Tolerance	0/+5 W



For tracker installation, please turn to Suntech for mechanical load information.

Electrical Characteristics

Module Type	STP600S-D60/Wmh		STP595S-D60/Wmh		STP590S-D60/Wmh		STP585S-D60/Wmh		STP580S-D60/Wmh	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax/W)	600	452.5	595	448.9	590	445.0	585	441.4	580	437.5
Optimum Operating Voltage (Vmp/V)	34.65	32.4	34.45	32.2	34.25	32.0	34.05	31.9	33.85	31.7
Optimum Operating Current (Imp/A)	17.32	13.97	17.28	13.94	17.23	13.89	17.19	13.86	17.14	13.81
Open Circuit Voltage (Voc/V)	41.85	39.4	41.65	39.2	41.45	39.1	41.25	38.9	41.05	38.7
Short Circuit Current (Isc/A)	18.31	14.73	18.27	14.70	18.22	14.66	18.18	14.63	18.13	14.59
Module Efficiency (%)	21.2		21.0		20.8		20.7		20.5	

STC: Irradiance 1000 W/m², module temperature 25 °C, AM=1.5; NMOT: Irradiance 800 W/m², ambient temperature 20 °C, AM=1.5, wind speed 1 m/s; Tolerance of Pmax is within +/- 3%;

Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42 ± 2 °C
Temperature Coefficient of Pmax	-0.34%/°C
Temperature Coefficient of Voc	-0.26%/°C
Temperature Coefficient of Isc	0.050%/°C

Graphs

Current-Voltage & Power-Voltage Curve (600S)

